

KERALA AGRICULTURAL UNIVERSITY
REGIONAL AGRICULTURAL RESEARCH STATION, PILICODE
Pincode 671 310, Kasaragod (Dist.) Kerala.

No. B3-2971/2019

Dated: 01.14.2019

TENDER NOTICE

Sealed competitive tenders are invited for the construction of new septic tank at RARS Pilicode. The sealed Tender is to be forwarded to The Regional Agriculture Research Station, Pilicode, Kasargod (Dist.)-671310.

The specification and bill of quantities to be followed in construction of the septic tank is given below:

Sl. No	Item & specification	Quantity	Rate	Amount	Remarks
1	Clearing jungle including uprooting of rank vegetation, grass, brush wood, trees and saplings of girth upto 30cm measured at a height of 1 m above ground level and removal of rubbish up to a distance of 50 m outside the periphery of the area cleared.	116.000sqm			
2.	Earth work in excavation by mechanical means (Hydraulic excavator)/manual means over areas(exceeding 30cm in depth, 1.5m in width as well as 10sqm on plan) including disposal of excavated earth, lead up to 50 m and lift up to 1.5m, disposed earth to be levelled and neatly dressed All kinds of soil	55.424 cum			
3.	Extra for every additional lift 1.5m or part thereof in excavation /banking excavated or stacked materials. All kinds of soil	17.625 cum			
4.	Providing and laying in position cement concrete of specified grade excluding the cost of centering and shuttering -All works up to plinth level 1:4:8(1 cement:4 coarse sand:8 graded stone aggregate 40 nominal size)	2.012 cum			

5.	Centering and shuttering and including strutting etc. And removal of form foundations, footings, bases of columns etc. For mass concrete	57.650 sqm			
6.	Steel reinforcement for R.C.C work including straightening, cutting ,bending, placing in position and binding all complete up to plinth Thermo-Mechanically Treated bars of grade Fe-500D or more	489.132 kilogram			
7.	Reinforced cement concrete work in walls (any thickness) including attached pilasters,buttreses,plinth and stringcourses,fillets,coloums,pillars,piers, abutments,posts and struts etc.up to floor five level excluding cost of centering, shuttering,finishing and reinforcement : 1:1.5:3 (1 cement: 1.5 coarse sand :3 graded stone aggregated 20mm nominal size)	6.863 cum			
8	Providing, hoisting and fixing up to floor level precast reinforced cement concrete work in string courses,bands,coping,bed plates ,anchor blocks,plain window sills and the like ,including the cost of required centering ,shuttering but excluding cost of reinforcement with 1:1.5:3(1 cement: 1.5 coarse sand(Zone-III) :3 graded stone aggregate 20mm nominal size)	2.852 cum			
9	Laterite masonry with neatly dressed stone of size 29x20x14 cm or nearest size in cement mortar 1:6 for foundation and basement including all cost of material, labour charges etc.	12.223 no			
10	12mm cement plaster of mix : 1:4(1 cement :4 fine sand)	6.500sqm			
11	Cement plaster 1:3(1 cement :3 coarse sand) finished with a floating coat of neat cement 12mm cement plaster	40.180 sqm			

12	Providing and fixing PVC pipes including jointing of pipes with one step PVC solvent cement, trenching, refilling & testing of joints complete as per direction of engineer in charge, 110mm dia 6Kgf/cm ²	20.00 metre			
13	Providing and fixing PVC moulded fittings/accessories for Rigid PVC pipes including jointing with PVC solvent cement 110x110x110mm dia Tee	2.000 no			

Prices may be quoted in the above given format for unit rates either per meter/Sq.m/Kg/numbers as applicable along with remarks for the brands supplied

Period for completion of work	Within 1 month of confirmation of tender
Last date for receipt of the Tender	At 03.00pm 22/11/2019
Date and time of opening of Tender	At 03.30pm 22/11/2019

Terms and conditions

1. Tender form

The tender form may be downloaded from the following web link in the internet www.kau.in/tenders. The cost of tender form and EMD will be accepted by way of separate DDs taken in favour of **Associate Director, Regional Agricultural Research Station, Pilicode Pin Code 671310, Kasargod Dist.** Should be enclosed along with tender. The tender cost and GST amount should be specified, while submitting the tender.

Cost of Tender Form : Rs.500/- + GST12 %(560) (As separate DDs)

2. Earnest Money Deposit (EMD):

EMD Rs.2650/- may be remitted by separate DD drawn in favour of **Associate Director, Regional Agriculture Research Station, pilicode pin code 671310, Kasargod Dist.**

3. The tender should be accompanied by an agreement in kerala stamp paper worth **Rs.200/-(Rupees Two hundred only)** and format can be downloaded from the website, <http://www.kau.edu/tenders>.
4. The sealed cover containing the tender documents should be super scribed as **“Tender for construction of new septic tank at RARS Pilicode**. The cover should contain the DDs for tender cost, EMD and the agreement required.
5. The successful tenderer should execute an agreement in Kerala Stamp paper worth Rs.200/-(Rupees Two hundred only) and furnish a security deposit of 5% of cost the rate quoted in the form of term deposit/bank guarantee/demand draft drawn in favour of **Associate Director, Regional Agriculture Research Station, Pilicode pin code 671310, Kasargod Dist. payable at the State Bank of India, Kayyur (Branch Code SBTR000573)**, when directed from this office. The format of the agreement can be downloaded from the website, <http://www.kau.edu/tenders>.
6. The total rate quoted, tax and other charge should be separately stated. The work shall be undertaken as per the direction from this station.

7. The Associate Director has the right to accept or reject any or all of the offers without assigning any reason.
8. The successful tender shall initiate the work within one week of award and should finish the work within one month.
9. If any hartal/strike/any unexpected holiday occurs on the date of opening of tender, the tender will be opened at the same time on the next working day.
10. The work should be executed in accordance with the items, specification and drawing provided.

All the rules and regulation applicable to Government tender will be applicable to this tender also.

Special Conditions


1. Tenders insisting payment in advance either full or part for releasing the documents through bank are liable for rejection.
2. Payment will be made after satisfactory completion of the work.
3. The undersigned reserves the authority to accept or reject any or all of the offers for any particulars item without assigning any reason whatsoever.
4. The decision of the under signed in finalizing the tenders shall be final and binding.

***Enquiries if any may be mailed to rarspil@kau.in or contact 0467 2260632 / 0467 2260450**




ASSOCIATE DIRECTOR

To: Notice Board/KAU website.

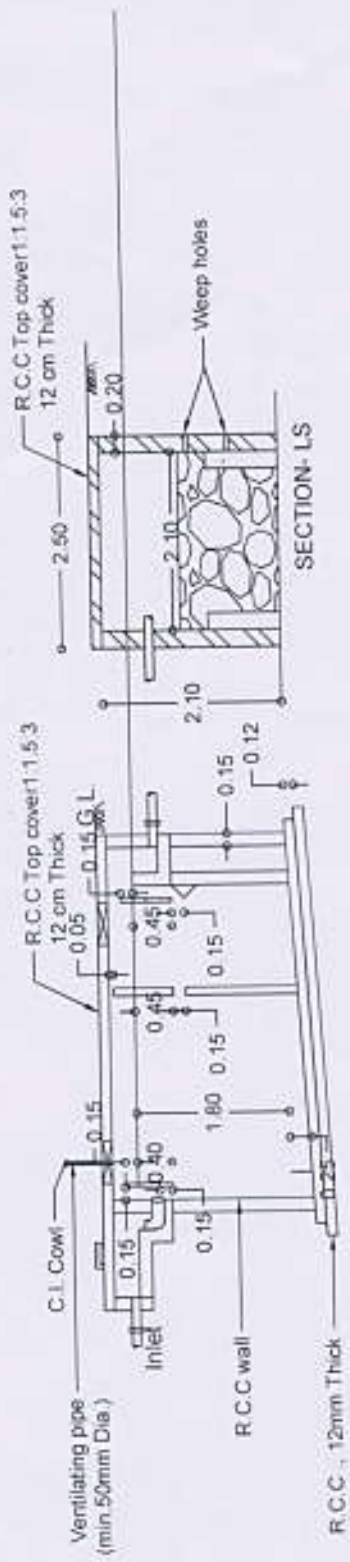

SECTION - LS

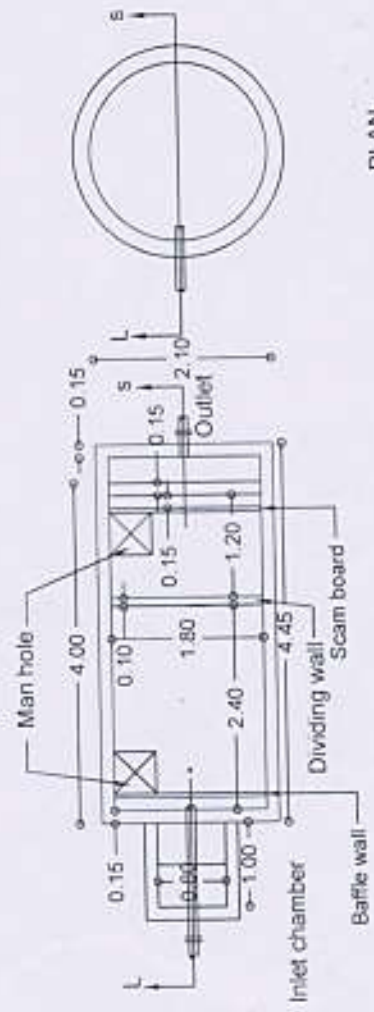

PLAN SEPTIC TANK

PLAN SOAKING PIT

ALL DIMENSIONS ARE IN METERS

Er. Raghav K. T.
Asst. Prof. Construct (Agril. Engrg.)
R.A.R.S. Pilibidala